

**NEW**

**COLUMN SPEAKERS**

# JS-C060

7.5W  
15W  
30W  
60W

70/100V

120W  
8 Ω

FULL  
RANGE

IP55




**FEATURES**

- 60W max column speaker for 100V line
- 120W use on 8 Ω
- 5-position switch for power selection
- 8 full-range drivers + 2 tweeters
- Cable gland for secure wiring
- IP55-rated with rear cover for full weatherproofing
- Comes with mounting brackets and screws (JS-COFIX)
- Coverage angle: 120° (horizontal) × 70° (vertical)

**APPLICATIONS**

- Conference rooms, places of worship, educational institutions, and more

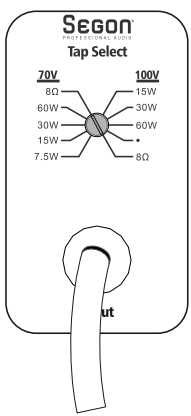

JS-COFIX: Wall mounting brackets

JS-C060: Rear panel - connectors

**SPECIFICATIONS**

	JS-C060BL	JS-C060N
Type	Column Speaker	
Material	Lacquered aluminum (white or black)	
Power Settings	7.5W@70V;15W@100V Tap=666Ω 15W@70V;30W@100V Tap=333Ω 30W@70V;60W@100V Tap=166Ω 60W@70V;N/C@100V Tap=83Ω 120W ( 480W peak ) , 100hrs/8Ω	
Frequency Response	95 Hz - 20 KHz	
Drivers	8 x 2.7 (in) full range 2 x 1 (in) tweeters	
Sensitivity	93 dB	
Max SPL	114 dB	
Coverage Angle	120° x 70°	
Connector	Cable gland, rotary selector switch	
Dimensions (W × D × H)	1170 x 91 x 120 mm	
Weight	6.5 Kg	
Weatherproofing	IP55	
Accessories	Wall mounting brackets and screws included (JS-COFIX)	

**MODEL DESIGNATIONS**

- White column speaker 60W ..... JS-C060BL (code 02711)
- Black column speaker 60W ..... JS-C060N (code 02712)