


MIXING CONSOLE

LA-MIX8AM

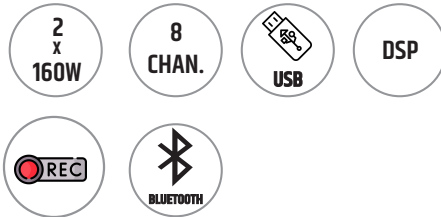

DESCRIPTION

2 x 160W amplified mixer
 Integrated USB sound card
 Integrated Bluetooth receiver
 Recording function
 Jack/XLR combo input with phantom power
 1 stereo input channel with volume control
 1 mono input channel with low mic noise - preamp 8-band equalizer and pan/balance for each channel

FEATURES

It is equipped with :

- 2 balanced MIC/LINE XLR inputs
- 2 mono XLR and 6.35 mm stereo inputs
- 1 stereo RCA and balanced 6.35 mm jack input
- 1 compressor input 1 and 2
- 48 V phantom power with ON/OFF switch on rear of console
- 8-band equalizer, PEAK LED on each MIC channel
- 1 Aux/Send per channel for external effects and monitoring
- Balanced jack outputs for control and headphones
- Digital display
- USB and Bluetooth multimedia player

FEATURES

LA-MIX8AM

Type	Table de mixage
Power Supply	Adaptateur AC
Parametric EQUALIZER High	12KHz ± 15dB
Parametric EQUALIZER Low	80Hz/± 15dB
Inputs	3.5 + 6.3mm Jack, RCA, XLR
Outputs	3.5mm Jack, RCA
Frequency response:	20Hz ~ 20KHz/± 0.5dB
Sensitivity range	+20 to -20 dB
Signal-to-noise ratio	> 90 dB
DTotal harmonic distortion	< 0,1%
DSP mode	100 pre-recorded effects Hall, vocal, room... A / D and D / A converters: 24 bit
Dimensions (L x P x h)	530 x 550 x 320 mm
Weight	15 kg

MODEL DESIGNATIONS

8-channel mixer LA-MIX8AM
 (code 02707)

