


NEW

ĂN PLĂGIER "PĂREAN PLĂGIERȘ

AM-350D AM-500D

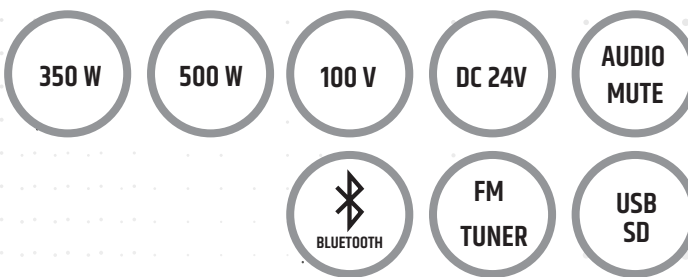

AMPLIFIER-PREAMPLIFIERS



DESCRIPTION

These mixer amplifiers are available in 350W and 500W versions.

Multimedia player: FM Tuner / USB / SD / Bluetooth
They offer 100V speaker outputs.

They operate on AC 110V – 220V – 50/60Hz or DC 24V.

FEATURES

Equipped with:

- 3 combo XLR inputs with 6.35 mm JACK (MIC priority dipswitch)
- 2 AUX inputs via RCA
- 1 PRE OUT output via RCA and 1 PRE OUT via XLR
- MP3 player module with FM Tuner / USB / SD
- Bluetooth receiver module for streaming from mobile phone, tablet, or laptop
- Thermal, overload and short-circuit protection
- Audio mute function, chime, and siren (Euroblock)
- Telephone paging (Euroblock)
- Remote control included



SPECIFICATIONS

	AM-350D	AM-500D
Type	Amplifier-Preamplifier	
Power Supply	AC 110V / 220V – 50 - 60Hz DC 24 V	
Output Power	350 W RMS	500 W RMS
Speaker Outputs	70 V / 100 V	
Output / Sensitivity	0 dBV / 600 Ω	
Inputs / Sensitivity	AUX 1-2 MIC 1-3	550 mV / 10 kΩHM 1.6 mV
Tone Controls	Bass : ± 10 dB à 100 Hz Treble: ± 10 dB à 10 kHz	
Bandwidth	80 Hz - 20 000 Hz (± 3 dB)	
Signal-to-Noise Ratio	≥ 75 dB	
Total Harmonic Distortion	< 0,5 %	
Indicators	Power LED, Output level VU meters	
Dimensions (W x D x H)	485 x 320 x 88 mm - 2U	
Weight	13.5 kg	11 kg

MODEL DESIGNATION

Amplifier-Preamplifier 350 W	AM-350D (code 02789)
Amplifier-Preamplifier 500 W	AM-500D (code 02790)