
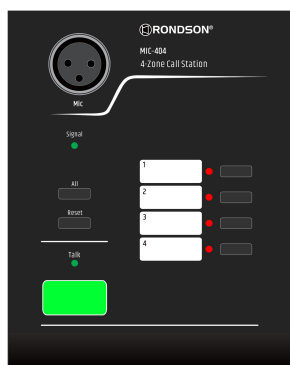


NEW

PREAMPS - MATRIX
MIXING TABLE

PŘEÁN PLÍGÍEŘŠ

MX-404

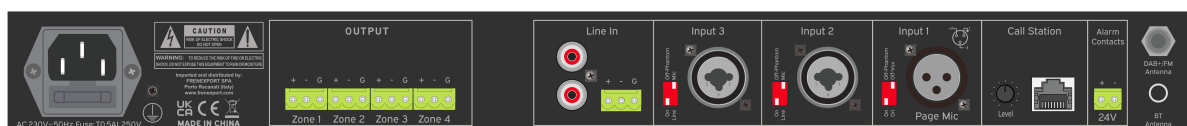

MIC-404
Multi-zone microphone call station



DESCRIPTION

The MX-404 mixer preamplifier offers 4 inputs that can be routed to 4 independently controllable output zones.

The MIC-404 multi-zone paging microphone is compatible with this preamplifier, allowing zone-based announcements.

FEATURES

Equipped with:

- Multimedia player: FM TUNER / USB / BLUETOOTH (rear antenna)
- 2 universal inputs on combo XLR & 6.35 mm JACK, configurable for MIC/LINE with phantom power
- 1 universal input on XLR (MIC)
- 1 LINE input via RCA / Euroblock (phantom power / VOX / priority sensitivity)
- 1 AUX input via 3.5 mm mini jack (front panel)
- 4 zone outputs with volume control and LED level meters
- 4 Euroblock terminal outputs
- 30V power supply
- RJ45 for MIC-404 (volume control)
- 24V Mute terminal
- Media / Line level selection and adjustment

SPECIFICATIONS

MX-404

Type	4 Channel Matrix Preamplifier
Output / Sensitivity	MIC: 24 dBu (2.45 mV) - 5 kΩ balanced LINE: 10 dBu (775 mV) - 5 kΩ unbalanced AUX: 60 dBu (245 mV) - 15 kΩ unbalanced
Output Level	+4 dBu (V.R MAX)
Total Harmonic Distortion	+8 dBu (V.R MAX)
Distorsion harmonique totale	< 0,03 %
Bandwidth (Line signal)	20 - 22 000 Hz (± 0,5 dB)
Phantom Power	15 V
Signal-to-Noise Ratio	MIC > 75 dB LINE/AUX : > 85 dB
Signal-to-Noise Ratio	> 80 dB (ligne) - 75 dB (micro)
Consumption	4,8 W
Power Supply	AC 230V - 50/60 Hz
Dimensions (W x D x H)	482 x 122 x 44 mm 1U
Weight	1.8 kg

4 Zone Preamplifiers..... **MX-404**
(code 02782)