


CEILING SPEAKERS

CSL-506

1,5 W
3 W
6 W

100 V

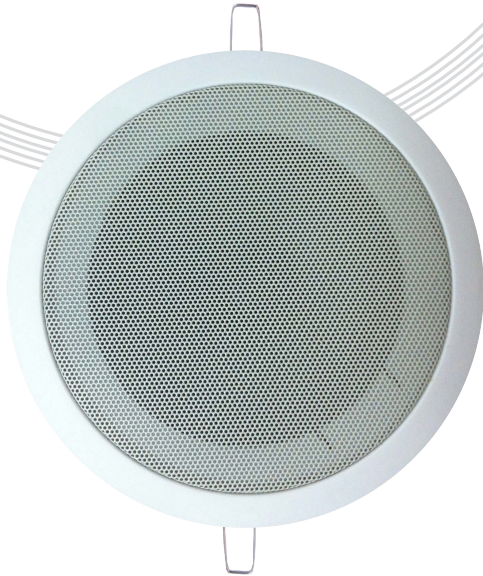

DESCRIPTION

- Quick-fit ceiling loudspeaker in plastic enclosure and metal grille, 70/100 V line operation, 3 power levels selectable via domino switch
- Good quality/price ratio
- Discreet, modern design

FEATURES	CSL-506
Type	Built-in loudspeaker
Material	ABS + Métal
Speaker	130 mm-8 Ω
Acoustic Pressure	89 dB/1 W / 1 m
Frequency band	180 -15000 Hz
Line power	6 - 3 - 1,5 W
Impedances 100 V	1,7 KΩ / 3,3 KΩ / 6,6 KΩ
Connection	On domino
Dimensions (Ø x h)	Ø 175 x 50,7 mm
Weight	0,5 kg
Built-in diameter	Ø 150 mm

MODEL DESIGNATION


Ceiling loudspeaker **CSL-506**
(code 02227)

CEILING SPEAKERS

CSL-610

2,5 W
5 W
10 W

100 V

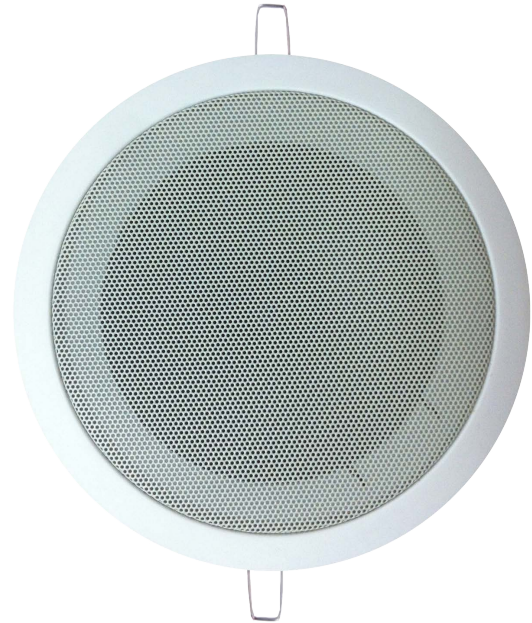

DESCRIPTION

- Quick-fit ceiling loudspeaker in plastic enclosure and metal grille, 70/100 V line operation, 3 power levels selectable via domino switch
- Good quality/price ratio
- Discreet, modern design

FEATURES	CSL-610
Type	Built-in loudspeaker
Material	ABS + Métal
Speaker	Ø 160 mm-8 Ω
Acoustic Pressure	92 dB/1 W / 1 m
Frequency band	150 -15000 Hz
Line power	10 - 5 - 2,5 W
Impedances 100 V	1KΩ/2KΩ/4KΩ
Connection	On domino
Dimensions (Ø x h)	Ø 188 x 65,2 mm
Weight	0,6 kg
Built-in diameter	Ø 165 mm

MODEL DESIGNATION

Ceiling loudspeaker **CSL-610**
(code 02228)